


UNTC Technical Parameters

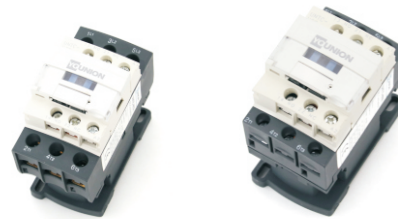

Type		UNTC-N09	UNTC-N12	UNTC-N18	UNTC-N25	UNTC-N32	
Rated Power kW/HP(AC-3) IEC60947-4-1 GB14048.4	200-240V	2.2/3	3/4	4/5.5	5.5/7.5	7.5/10	
	380-440V	4/5.5	5.5/7.5	7.5/10	11/15	15/20	
	500-550V	5/7	7.5/10	9/12	15/20	18.5/25	
Rated Current A(AC-3) IEC60947-4-1 GB14048.4	200-240V	11	15	22	30	40	
	380-440V	9	12	18	25	32	
	500-550V	7	9	12	18	21	
Conventional Thermal Current I _{th} :(A)		18	18	25	40	40	
Rated Insulated Voltage U _i :(V)		660					
Auxiliary Contact AC-15	Contact Arrangement	Standard	1NO+1NC				
		Special	-				
	Rated Current A(AC-15) IEC60947-5-1 GB14048.5	200-240V	1.6				
		380-440V	0.95				
Conventional Thermal Current I _{th} :(A)		16					
(AC-3)Electrical Life(Million Times)		1					
Mechanical Life(Million Times)		5					
Dimensions(mm)							

UNTR Technical Parameters

Type	UNTR-13					
Current Setting Range	Manual or Auto Return					
 Thermal Overload Relay	Nominal Rating(A)			Setting Range(A)		
	0.16	1.6	8	0.1-0.16	1-1.6	5.5-8
	0.25	2	10	0.16-0.25	1.25-2	7-10
	0.4	2.5	13	0.25-0.4	1.6-2.5	9-13
	0.63	4	18	0.4-0.63	2.5-4	12-18
	1	6	25	0.63-1	4-6	17-25
Contact Arrangement	1NO+1NC					
Model of Matching Contactors	UNTC-09,UNTC-12,UNTC-18,UNTC-25,UNTC-32					

UNTC Technical Parameters



Type		UNTC-N40	UNTC-N50	UNTC-N65	UNTC-N80	UNTC-N95
Rated Power kW/HP(AC-3) IEC60947-4-1 GB14048.4	200-240V	11/15	15/20	18.5/25	22/30	25/35
	380-440V	18.5/25	22/30	30/40	37/50	45/60
	500-550V	30/40	37/50	37/50	45/60	45/60
Rated Current A(AC-3) IEC60947-4-1 GB14048.4	200-240V	50	60	75	90	110
	380-440V	40	50	65	80	95
	500-550V	34	39	42	49	59
Conventional Thermal Current I _{th} :(A)		60	80	80	110	110
Rated Insulated Voltage U _i :(V)		660				
Auxiliary Contact AC-15	Contact Arrangement	Standard	1NO+1NC			
		Special	-			
	Rated Current A(AC-15) IEC60947-5-1 GB14048.5	200-240V	1.6			
		380-440V	0.95			
Conventional Thermal Current I _{th} :(A)		16				
(AC-3)Electrical Life(Million Times)		1				
Mechanical Life(Million Times)		5				
Dimensions(mm)						

UNTR Technical Parameters

Type	UNTR-23		UNTR-33			
 Thermal Overload Relay	Current Setting Range					
	Contact Arrangement					
	Nominal Rating(A)	Setting Range(A)	Nominal Rating(A)		Setting Range(A)	
32	23-32	40	70	30-40	55-70	
36	28-36	50	80	37-50	63-80	
		65	93	48-65	80-93	
Contact Arrangement	1NO+1NC		1NO+1NC			
Model of Matching Contactors	UNTC-32,UNTC-40		UNTC-40,UNTC-50,UNTC-65,UNTC-80,UNTC-95			